

Compression Force Sensor DK5

Scope of Supply

Force sensor with 5 m cable (PVC),
with cable connection T:
cable gland, straight;

Variant



N2: plug connection, straight,
M12, moulded

Additional Option




F: For use in explosive areas,
incl. J-Box

Connection

Variant T



Variant N2

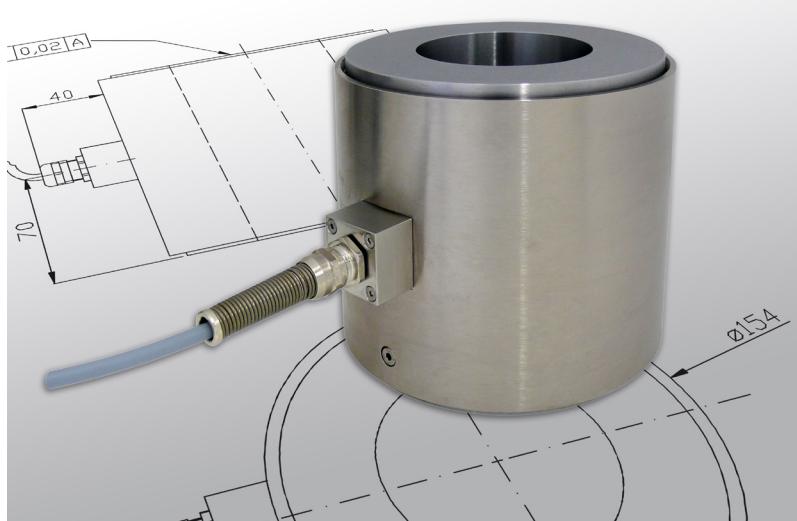

Special Features

- Compact design for large forces
- Extremely robust
- Nickled steel, stainless steel on request

The sensors DK5 are especially designed for applications in harsh environments, where large forces must be measured reliably. The load cell basically consists of a cylindrical compression body, design and optimized with the finite element analysis.

Strain gauges applied to the active areas of the sensor body surface measure the force-proportional strains. A downstream measuring amplifier from the HAEHNE - Program processes the measuring signals and supplies the strain gauge full bridge.

Ordering example:

	DK5-2MN-TF
Type	
Nominal force	
Variant / Option	

Technical Data	% Values based on nominal force
Nominal force	1MN; 2 MN
Max. operating force	150 %
Absolute max. force	250 %
Nominal rating	1.5 mV/V
Comined error	1.0 %
Nominal ambient temperature	+ 10 ... + 60° C (50... 140 °F)
Operational temperature range	- 10 ... + 70° C (14... 158 °F)
Nominal resistance of the strain gauge bridge	700 Ω
Max. bridge supply voltage	10 VDC
Enclosure protection	IP 64
Sensor cable	PUR, 4x0.34 mm ² , DIN47100

Dimensions in mm (1 mm = 0.03937 inches)

